



CLEARVIEW
TOWING MIRRORS

CLEARVIEW
ACCESSORIES

**FORD RANGER/
EVEREST/SUPER
DUTY
OAT (OUTSIDE
AMBIENT
TEMPERATURE)
SENSOR UPDATE
2026+ MODELS ONLY**

*Door Trim and Mirror
Removal are common to
MY2022
Ford Ranger Instructions*

Turnover to Pg.2

VERSION 1.0

1. If your vehicle was built in NOV'17th 2025 or later, (please refer to your dealer), the OEM mirror will be fitted with a modified Outside Air Temperature(OAT) sensor. Refer to the images below.

Ranger MY26 OAT sensor located under Mirror Head



View showing MY26 OAT Sensor in position




2. If above image shown is the level of OAT in your vehicle, then skip step 8, on page 14 of the Clearview Towing Mirror Installation instructions. There is no need to remove the OAT from OEM Mirror as it cannot be re-used in the Clearview Towing Mirror.

3. The supplied Clearview Tow Mirror Box - CVNG-FD/CVC-FD will include a FORD compatible OAT Sensor (M2DZ 12A647 A) kit provided as below image.



3. Please proceed to Step 15 on page 25 of the Clearview Towing Mirror Installation instructions and Install the Ford-compatible OAT sensor (M2DZ 12A647 A) onto the LAP bracket of the towing mirror, with or without 360° camera provision, as applicable to your vehicle as shown in the image below.

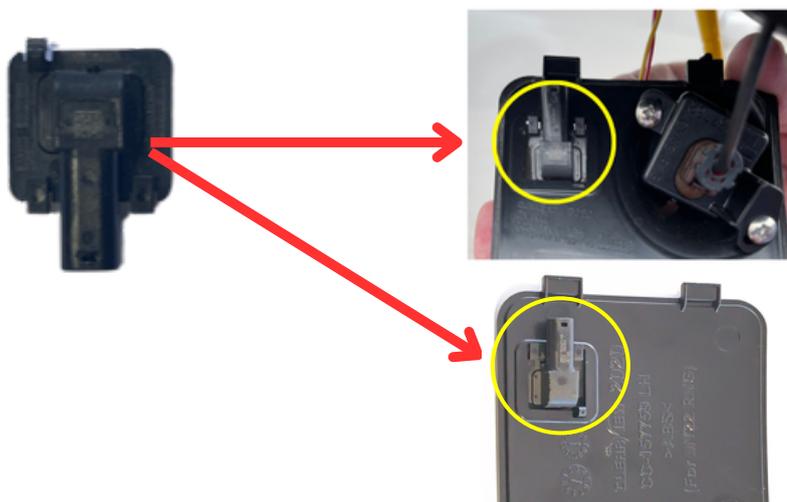

LAP WITH 360°
CAMERA PROVISION

LAP WITHOUT 360°
CAMERA PROVISION